Specs

2019 Ranger

Use the menu on the left — or the menu button on your smartphone — to select and view information related to wheels, exterior colors and interior trim. Key product specifications include vehicle dimensions and capacities, detailed engine information, transmission gear ratios and more.

SuperCab

2019 Ranger

Drive		4x2
Cargo Box (ft.)		6.0
Wheelbase (in.)		126.8
	Description (in.)	
	Front Overhang	35.8
	Front Bumper to Back of Cab	132.1
	Overall Length	210.8
	Rear Overhang	48.2
	Overall Width (with mirrors/mirrors folded)	85.8/77.8
	Overall Height(1)	70.7
	Track Width – Front/Rear	61.4/61.4
	Ground Clearance	8.4
	Approach Angle (degrees)	27.9
	Breakover Angle (degrees)	22.7
	Departure Angle (degrees)	25.2

(1) The height data shown represents dimensions of a nominal vehicle with no options. Actual height may vary due to production tolerances.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

SuperCrew

2019 Ranger

Drive		4x2
Cargo Box (ft.)		5.0
Wheelbase (in.)		126.8
	Description (in.)	
	Front Overhang	35.8
	Front Bumper to Back of Cab	143.8
	Overall Length	210.8
	Rear Overhang	48.2
	Overall Width (with mirrors/mirrors folded)	85.8/77.8
	Overall Height(1)	71.1
	Track Width – Front/Rear	61.4/61.4
	Ground Clearance	8.4
	Approach Angle (degrees)	27.9
	Breakover Angle (degrees)	22.7
	Departure Angle (degrees)	25.2

(1) The height data shown represents dimensions of a nominal vehicle with no options. Actual height may vary due to production tolerances.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Pickup Box Dimensions

2019 Ranger

Specs > Dimensions/Weights/Capacities

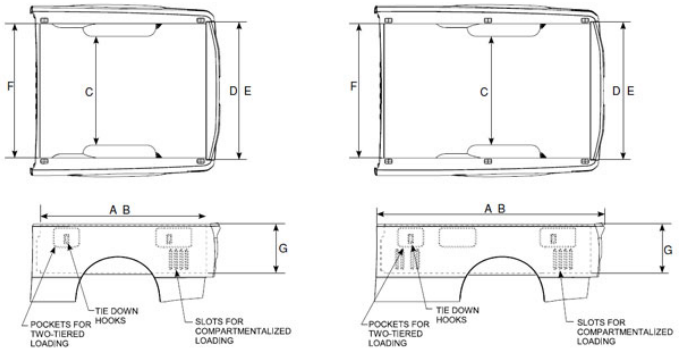

Box Size (ft.)		5.0[1]	6.0[2]
Code	Description (in.)		
A	Cargo Box Inside Length @ Floor	61.0	72.8
B	Cargo Box Length @ Top	58.2	70.0
C	Cargo Width @ Wheelhouse	44.8	44.8
D	Rear Opening Width @ Floor	55.4	55.4
E	Rear Opening Width @ Top	55.5	55.5
F	Cargo Body Maximum Inside Width	61.4	61.4
G	Cargo Body Height with Molding	20.9	20.8
	Cargo Box Volume[3]	43.3	51.8

(1) SuperCrew only.

(2) SuperCab only.

(3) Does not include allowances for wheelhouses.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Interior Dimensions

2019 Ranger

Specs > Dimensions/Weights/Capacities

Description (in.)	SuperCab	SuperCrew
Head Room (Front, maximum)	41.0	41.0
Head Room (Rear)	35.9	38.3
Leg Room (Front)	43.1	43.1
Leg Room (Rear)	30.4	34.5
Shoulder Room (Front)	56.6	56.7
Shoulder Room (Rear)	55.2	56.3
Hip Room (Front)	55.8	55.8
Hip Room (Rear)	55.3	53.5

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Interior Volume

2019 Ranger

Specs > Dimensions/Weights/Capacities

SuperCab

Cab Position	Volume (cu. ft.)
Front Passenger	54.4
Rear Passenger	34.8
Total Passenger	89.2
Cargo Volume Behind First Row Rear-seat Cushion Folded Up	26.5

SuperCrew

Cab Position	Volume (cu. ft.)
Front Passenger	54.5
Rear Passenger	43.1
Total Passenger	97.6
Cargo Volume Behind First Row Rear-seat Cushion Folded Up	33.9

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Fuel Tank Capacity

2019 Ranger

Specs > Dimensions/Weights/Capacities

Cab	Location	Capacity (gal.)
SuperCab	Midship	18.0
SuperCrew	Midship	18.0

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Accessory Reserve Capacity (ARC) Calculation

This section provides the information needed to calculate the effect that vehicle options have on the payload capacity of Ford light trucks.

This information is useful to customers who plan to add aftermarket accessories or haul cargo at or near the vehicle's maximum capacity.

This section includes charts for each series, listing the maximum allowable weights for each GVWR.

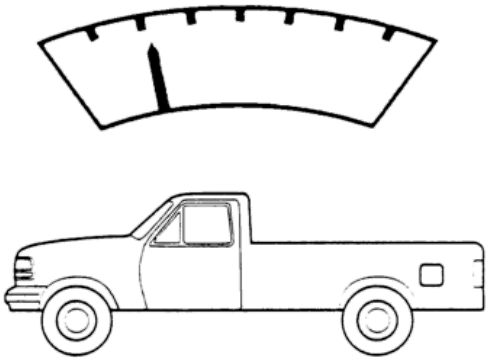

Accessory Reserve Capacity

You can help prospective buyers estimate the total weight of accessories, equipment and modifications that may be added to the completed vehicle.

Ford vehicles are certified for compliance with the following FMVSS (Federal Motor Vehicle Safety Standards) or CMVSS (Canadian Motor Vehicle Safety Standards):(1)

- 204 — Steering Column Rearward Displacement
- 208 — Occupant Crash Protection
- 212 — Windshield Mounting
- 219 — Windshield Zone Intrusion
- 301 — Fuel System Integrity
- 303 — CNG Fuel System Integrity (Canadian Standard 301.2)

The total added accessory weight must not exceed the allowable weight shown in the tables. You should make retail customers who intend to modify or install accessories or equipment aware of this fact.

If the modification or installation of accessories or equipment causes the unloaded weight of the vehicle, as revised with the added equipment, to exceed the test vehicle weight, the U.S. vehicle alterer(2) may be responsible to certify the altered vehicle according to Title 49, Code of Federal Regulations 567.7 and 568.8. A Canadian vehicle alterer may be responsible to certify the altered vehicle according to Section 6 of the Canadian Motor Vehicle Safety Regulations.

In this section, each vehicle has a worksheet that addresses Total Accessory Reserve Capacity only. It does not consider Front Axle Accessory Reserve Capacity and does not include DSO option weights in the calculations.

(1) Ford Motor Company's certification of compliance with FMVSS/CMVSS is based on specific vehicle test weights. These standards are applicable to completed vehicles of 10,000-lb. GVWR or less. Maximum allowable weights shown in the tables for vehicles above 10,000-lb. GVWRs are maximum recommended values for optimum performance, durability and customer satisfaction.

(2) The same procedure to estimate the "Total Accessory Reserve Capacity" is recommended to completed vehicle alterers in Canada.

To approximate the amount of accessory equipment or modification weight that can be added to a Ford light truck without exceeding the test vehicle weight, calculate an estimated Total Accessory Reserve Capacity as follows:

1. Determine the "Total Actual Regular Production Option Content Weight" of the desired regular production options from the corresponding Accessory Reserve Capacity Calculation/Worksheet on the following page.
2. Subtract the "Total Actual Regular Production Option Content Weight" from the "Maximum Allowable Weight (Regular Production Options & Aftermarket Equipment)" for the appropriate model. The difference is the estimated "Total Accessory Reserve Capacity."

	Maximum Allowable Weight (Regular Production Options & Aftermarket Equipment)
–	**Total Actual Regular Production Option Content Weight**
=	**Total Accessory Reserve Capacity**

(See Accessory Reserve Capacity (ARC) Calculation/Worksheet for example.)

Warning: The Accessory Reserve Capacity weight information addresses FMVSS and CMVSS Nos. 204, 208, 212, 219, 301 and 303 compliance only. For all light-duty trucks with a GVW rating under 8500 lbs., federally certified trucks with a GVW rating of 8500 to 10,000 lbs. that are optionally emission certified to light-duty standards and all California complete vehicles with a GVW rating of 14,000 lbs. or less, if more than 500 lbs. is added to the vehicle's "maximum vehicle weight,"(1) the modifier may be responsible for recertification to the applicable EPA or CARB emissions standards.

(1) Important: "Maximum vehicle weight" is calculated in accordance with the definition provided in an EPA guidance letter dated July 13, 1979, from C.N. Freed of the EPA to M.H. McBride, legal counsel of the Recreation Vehicle Industry Association. The preceding conditions are based on that letter and on EPA Advisory Circular No. 64 — a March 7, 1977, publication that provides guidance on the need for separate certification of vehicles modified after original manufacture, but prior to sale and delivery to the ultimate purchaser. Additional guidance or questions concerning EPA's policies with respect to alterers of completed vehicles should be directed to legal counsel or the Environmental Protection Agency.

Base Curb Weight

- The weight of the vehicle including standard equipment, oil, lubricants and a full tank of fuel. It does not include the weight of driver, passengers, cargo or any optional or aftermarket equipment
- **Base curb weights for each engine/standard equipment transmission combination are listed in the Weight Ratings pages of each vehicle section (see Maximum Payload Weight Ratings for reference)**
- Actual Regular Production Option Content Weights can be found in the charts under Actual Regular Production Option Content Weights

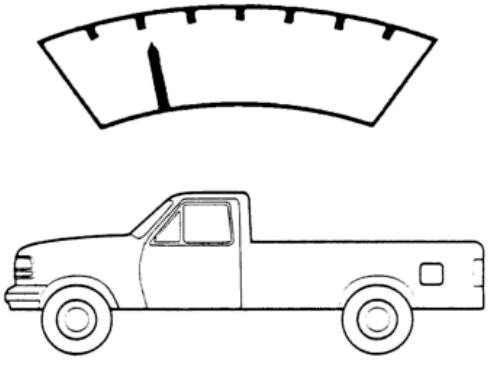

Gross Axle Weight

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The total weight placed on each axle of the vehicle (front and rear).

Gross Axle Weight Rating (GAWR)

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The maximum allowable weight to be placed on an individual axle (front or rear). Gross Axle Weight Ratings are provided for both front and rear axles.

Gross Combination Weight (GCW)

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

Gross vehicle weight plus the trailer weight.

Gross Combination Weight Rating (GCWR)

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The maximum allowable weight of the towing vehicle, the trailer and all associated passengers, cargo and equipment.

The point to remember is that the actual weights should never exceed the listed weight ratings. And remind your customers that if they do exceed the recommended weight ratings, they could disqualify their warranty coverage.

Gross Vehicle Weight (GVW)

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The weight of the vehicle including driver, passengers, optional and aftermarket equipment, and all cargo.

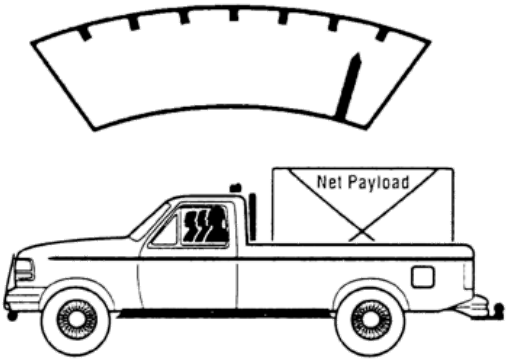

Gross Vehicle Weight Rating (GVWR)

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The maximum allowable weight of the fully loaded vehicle (including passengers and cargo).

Maximum Payload Weight Rating

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

This is the advertised payload rating. It is the maximum allowable payload for the truck, including driver, passengers, optional and aftermarket equipment, and cargo. The weight of the engine and its standard transmission is already factored into the Maximum Payload Weight Rating. If the engine is also available with an optional transmission, that engine/transmission weight can be found in the Actual Regular Production Option Content Weight charts.

Vehicle Payload Calculation	Front/Total (lbs.)
Maximum Payload Weight Rating(1)	____/____
Less Total Actual Regular Production Option Content Weight (from Line A, Payload/GVWR Worksheet)	____/____
Equals Net Total Vehicle Payload (Front and rear axles and spring capacities will be sufficient to carry this payload uniformly distributed in vehicle cargo area)	____/____

(1) Weight for driver and passengers must be deducted. Refer to the individual vehicle weight rating pages for maximum payload weight ratings. Refer to Regular Production Option Content Weight.

NOTE: **Front springs are computer-selected to meet specific option requirements for each vehicle; HD front springs are standard if vehicle option weights require.**

Maximum Payload Weight Ratings

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The Payload Weight Ratings and the Accessory Reserve Capacity(1) (ARC) or maximum allowable weight for regular production option charts are published and can be found in the weight ratings pages of the individual vehicle sections. This information is grouped together with other model, engine/transmission and maximum gross vehicle weight rating (GVWR) data for ease of use.

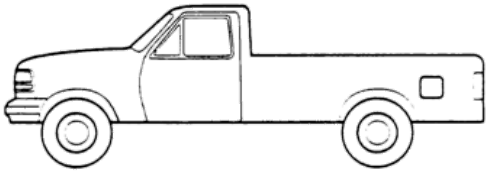

(1) Accessory Reserve Capacity (ARC) weight is the maximum allowable weight for regular production options and aftermarket equipment for models with standard equipment and the indicated engine/transmission combination.

Option Weights

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The weight of any added equipment that is not included in the base curb weight.

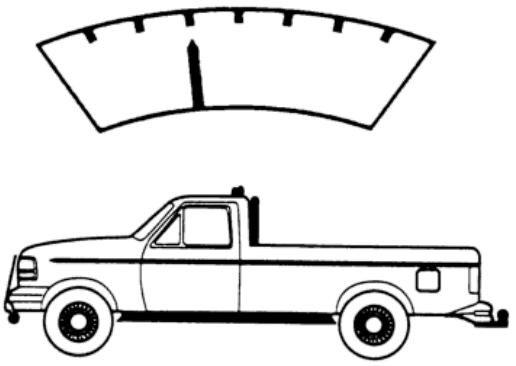

Passenger Weight

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

Defined as 150 lbs. multiplied by the number of safety-belted seating positions, including the driver, that the vehicle can carry.

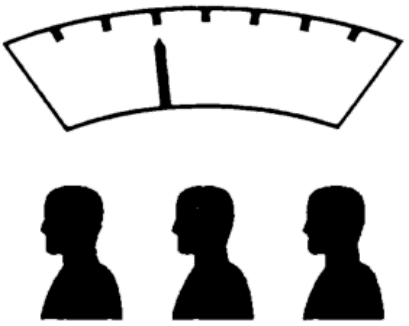

Payload

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

- Maximum payload is defined as the weight of all passengers, optional and aftermarket equipment, and cargo
- Net payload is defined as the weight that can be placed in the truck after subtracting for driver, passengers, and optional and aftermarket equipment

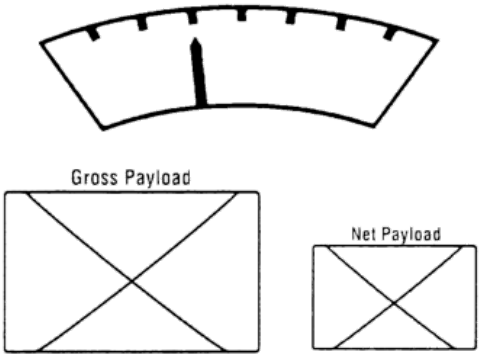

Tongue Weight

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The amount of the trailer's weight that bears down on the trailer hitch (10 to 15 percent of the total loaded conventional trailer weight or 15 to 25 percent of the total loaded 5th-wheel trailer weight).

Trailer Weight

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

The weight of a fully loaded trailer, including all attachments, lights, etc.

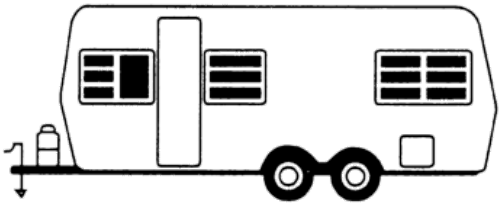

Truck “Nominal Tonnage”

2019 Ranger

Specs > Dimensions/Weights/Capacities > General Truck Payload Information

“Nominal Tonnage” is a term that Ford and other manufacturers have historically used to generally categorize the load capacity of a vehicle series; it is not a term defined by federal or state law.

Our COV (Certificate of Origin for a Vehicle) includes each particular vehicle’s shipping weight as well as the vehicle’s gross vehicle weight rating or GVWR (from which one can determine the particular vehicle’s rated carrying capacity, including driver, passengers, fluids, body upfit [if applicable] and aftermarket accessories). The COV also includes the vehicle’s “Nominal Tonnage.”

“Nominal Tonnage” provides the general usable cargo capability that most (but not all) of the vehicles with the designated nominal tonnage can expect to handle. That is, nominal tonnage states the general load capacity for each vehicle series, although particular vehicles may have a higher (or in some circumstances, lower) load capacity based on the specifications of the particular vehicle.

Relevant Vehicle Series/Nominal Tonnage Relationship Categories	
Nominal Tonnage	Vehicle
½	F-150, Transit Connect
¾	E-350 Cutaway/Stripped Chassis, Transit-150 Cargo Van/Passenger Van, Transit-250 Cargo Van, Transit-350 Cargo Van/Passenger Van, Transit-250/350 Cutaway/Chassis Cab, F-250 Pickup
1	E-450 Cutaway/Stripped Chassis, F-350 Pickup, F-350 Chassis Cab
1½	Transit-350 Cargo Van/Passenger Van, Transit-350 Cutaway/Chassis Cab, F-450 Pickup, F-450 Chassis Cab
2	F-550 Chassis Cab

Vehicle Class Ratings by GVWR

2019 Ranger

Weight Class	GVWR Range (lbs.)	Vehicle/Model
1	Up to 6000	Transit Connect (5060–5450 lbs.) Cargo Van (5130–5302 lbs.) Passenger Van (5060–5450 lbs.)
2	6001 to 10,000	Ranger (6050 lbs.) Transit-150 Cargo Van/Passenger Van (8600/8550 lbs.) Transit-250 Cargo Van (9000 lbs.) Transit-350 Cargo Van (9250–9950 lbs.) Transit-350 Passenger Van (9000–9400 lbs.) Transit-250 Cutaway/Chassis Cabs (9000 lbs.) Transit-350 Cutaway/Chassis Cabs (9500 and 9950 lbs.) F-150 (6070–7850 lbs.) F-250 Pickup (9900–10,000 lbs.) F-350 Pickup (9900–10,000 lbs.) F-350 Chassis Cab SRW (9800–10,000 lbs.)
3	10,001 to 14,000	E-350 Cutaway (10,050–12,500 lbs.) E-350 Stripped Chassis (11,500–12,500 lbs.) Transit-350 Cargo Van/Passenger Wagon (10,360 lbs.) Transit-350 Cutaway/Chassis Cab (10,360 lbs.) F-350 SRW Pickup (10,100–11,500 lbs.) F-350 DRW Pickup (13,000(1)–14,000 lbs.) F-350 Chassis Cab SRW (10,500–11,500 lbs.) F-350 DRW Chassis Cab (14,000 lbs.) E-450 Cutaway and Stripped Chassis (14,000 lbs.) F-450 Pickup (14,000 lbs.)
4	14,001 to 16,000	E-450 Cutaway (14,200–14,500 lbs.) E-450 Stripped Chassis (14,500 lbs.) F-450 Chassis (15,000–16,000 lbs.) F59 Commercial Stripped Chassis (16,000 lbs.) F53 Motorhome Chassis (16,000 lbs.)
5	16,001 to 19,500	F-450 Chassis Cab (16,500 lbs.) F-550 (17,500 –19,500 lbs.) F59 Commercial Stripped Chassis (19,500 lbs.) F53 Motorhome Chassis (18,000 lbs.)
6	19,501 to 26,000	F-650 Gasoline (22,000–26,000 lbs.) Diesel (22,000–26,000 lbs.) F59 Commercial Stripped Chassis (22,000 lbs.) F53 Motorhome Chassis (20,500 –26,000 lbs.)
7	26,001 to 33,000	F-650 (27,500–29,000 lbs. Gas and Diesel) F-750 (31,000–33,000 lbs. Gas and Diesel)
8	33,001 plus	F-750 (34,200–37,000 lbs. Diesel)

(1) 13,000 lbs. pickup box delete only.

Weight Distribution

2019 Ranger

That portion of a vehicle's total weight that will be supported by each axle and each tire. Proper distribution of vehicle weight is critical to braking, handling and to the service life of components such as axles, springs, bearings and tires.

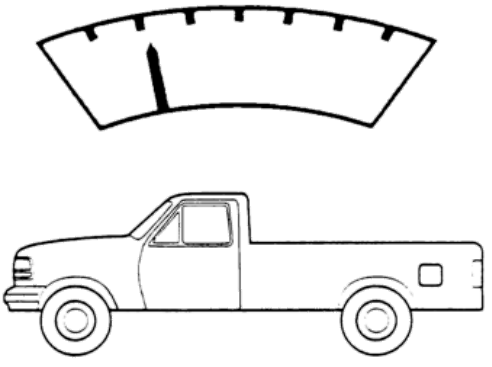

GVWR/Payload/Springs/Base Curb Weight

Cab/Drive/WB (in.)	Engine	Max. GVWR (lbs.)	Max. Payload (lbs.)(1)	Max. Std. Spring Select GAWR (lbs.)(2)		Base Curb Weight (lbs.)		
				Front	Rear	Front	Rear	Total
SuperCab 4x2 126.8	2.3L EcoBoost I-4	6050	1860	2885	3500	2368	1777	4145
SuperCrew 4x2 126.8	2.3L EcoBoost I-4	6050	1770	2930	3500	2377	1855	4232
SuperCab 4x4 126.8	2.3L EcoBoost I-4	6050	1650	3108	3370	2544	1810	4354
SuperCrew 4x4 126.8	2.3L EcoBoost I-4	6050	1560	3130	3370	2554	1887	4441

(1) Load rating represents maximum allowable weight of people, cargo and body equipment and is reduced by available equipment weight.

(2) Gross Axle Weight Rating (GAWR) is determined by the rated capacity of the minimum component of the axle system (axle, computer-selected springs, wheels, tires) of a specific vehicle. Front and rear GAWRs will, in all cases, sum to a number equal to or greater than the GVWR for the particular vehicle. Maximum loaded vehicle (including passengers, equipment and payload) cannot exceed the GVWR.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Ranger 4x2 Styleside Pickup

POWERTRAIN:		Refer to the Ordering Guide for 50 States Usage
Engine	Type	2.3L EcoBoost I-4
Transmission	Type	10R80 10-speed Auto OD
AXLES:		
Front Axle	Type	Long-spindle Double-wishbone, Coil-over-shock IFS
	Capacity (Rating @ Ground)	2885 lbs. SuperCab/2930 lbs. SuperCrew
Rear Axle	Type	Semi-floating
	Capacity (Rating @ Ground)	3500 lbs.
BRAKES:		
Front/Rear Disc	Type	Vented, Twin-piston Front and Single-piston Rear Caliper
	Rotor Diameter — Front/Rear	12.2"/12.1"
Power Assist Unit	Type	Tandem-diaphragm
	Effective Diameter — Front/Rear	TBD" Front/TBD" Rear
Anti-Lock Brake System		4-wheel (4-channel with AdvanceTrac Electronic Stability Control)
Parking Brake (Rear Brakes)		Mechanical Integrated
ELECTRICAL:		
Alternator	Rating	150 Amp, 2025 Watt
Battery	Type	Maintenance-free (Battery Saver System Standard)
	Rating	70-AH, 700 CCA; 80-AH, 800 CCA
Harnesses	Type	4-pin Connector
FUEL TANK:	Capacity	18.0 Gal.
JACK:	Capacity	1800/3968 (kg/lbs.)
STEERING:	Type	Power, Rack-and-pinion; Electric Power-assist
	Ratio	17.7:1
SUSPENSION:		
Frame	Type	Fully boxed, modular high-strength steel with 6 crossmembers
	Section Modulus (cu. in.)	See Frame Specifications
Springs, Front	Type	Coil, Computer-selected
	Rating @ Ground (min.)	NA
Springs, Rear	Type	Leaf, Two-stage Parabolic with Linear-rate, Computer-selected
	Rating @ Ground (min.)	3370 lbs.
Shock Absorbers	Gas-type (Size — Front/Rear)	1.77"/1.26"
Stabilizer Bar	Position/Diameter/Type	Front/TBD mm/TBD
TIRES:	Type	Steel-belted Radial All-season
	Size	Five 255/70R16 BSW
	Spare Tire Carrier	Rear Underframe, Winch-type with Safety Catch (Locking-type)
WHEELS:	Type and Size	16" x 7" Silver-painted Styled Steel with Same-size Steel Spare (6-hole Disc)

NOTE: Refer to Weight Ratings for Standard & Available Weight Rating Specifications (GVWR/Payload/Spring & GAWR/Base Curb Weight).

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

POWERTRAIN:		Refer to the Ordering Guide for 50 States Usage
Engine	Type	2.3L EcoBoost I-4
Transmission	Type	10R80 10-Speed Auto OD
Transfer Case	Type	Electronic Shift
	Low/High Gear Ratio	2.64:1/1.00:1
AXLES:		
Front Axle	Type	Long-spindle Double-wishbone, Coil-over-shock IFS
	Capacity (Rating @ Ground)	3108 lbs. SuperCab/3130 lbs. SuperCrew
Rear Axle	Type	Semi-floating
	Capacity (Rating @ Ground)	3370 lbs.
BRAKES:		
Front/Rear Disc	Type	Vented, Twin-piston Front and Single-piston Rear Caliper
	Rotor Diameter — Front/Rear	12.2"/12.1"
Power Assist Unit	Type	Tandem-diaphragm
	Effective Diameter — Front/Rear	TBD" Front/TBD" Rear
Anti-Lock Brake System		4-wheel (4-channel with AdvanceTrac Electronic Stability Control)
Parking Brake (Rear Brakes)		Mechanical Integrated
ELECTRICAL:		
Alternator	Rating	150 Amp, 2025 Watt
Battery	Type	Maintenance-free (Battery Saver System Standard)
	Rating	70-AH, 700 CCA; 80-AH, 800 CCA
Harnesses	Type	4-pin Connector
FUEL TANK:	Capacity	18.0 Gal.
JACK:	Capacity	1800/3968 (kg/lbs.)
STEERING:	Type	Power, Rack-and-pinion; Electric Power-assist
	Ratio	17.7:1
SUSPENSION:		
Frame	Type	Fully boxed, modular high-strength steel with 6 crossmembers
	Section Modulus (cu. in.)	See Frame Specifications
Springs, Front	Type	Coil, Computer-selected
	Rating @ Ground (min.)	NA
Springs, Rear	Type	Leaf, Two-stage Parabolic Linear-rate, Computer-selected
	Rating @ Ground (min.)	3370 lbs.
Shock Absorbers	Gas-type (Size — Front/Rear)	1.77"/1.26"
Stabilizer Bar	Position/Diameter/Type	Front/TBD mm/TBD
TIRES:	Type	Steel-belted Radial
	Size	Five 255/70R16 BSW
	Spare Tire Carrier	Rear Underframe, Winch-type with Safety Catch (Locking-type)
WHEELS:	Type and Size	16" x 7" Silver-painted Styled Steel with Same-size Steel Spare (6-hole Disc)

NOTE: Refer to Weight Ratings for Standard & Available Weight Rating Specifications (GVWR/Payload/Spring & GAWR/Base Curb Weight).

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

10-speed Automatic Transmission Specifications

2019 Ranger

Specs > Powertrain

Make/Type	Ford 10-speed Automatic Overdrive (10R80)
Engine	2.3L EcoBoost I-4
Ratios (to 1):	
1st	4.696
2nd	2.985
3rd	2.146
4th	1.769
5th	1.520
6th	1.275
7th	1.000
8th	0.854
9th	0.689
10th	0.636
Reverse	4.866
Converter Size and Type	238 mm double damper with pendulum
Converter Stall Ratio	1.83:1
Lubricant Capacity (qt.)	12.4 with top off for cooler
Planetary	Simple (4)
Oil Cooler	Yes, fastners to transmission
Speed Sensor System	(4) internal speed sensors
Fully Electronic Shift Scheduling	Yes
Weight (with Fluid)	239 lbs. (4x2) 235 lbs. (4x4)

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Engine

2019 Ranger

Specs > Powertrain

Driveline Layout	Front Engine, Rear Wheel (RWD) or 4x4
Engine Type	2.3L EcoBoost I-4
Displacement (liters/cu. in.)	2.3/140
Horsepower (@ rpm)	270 @ 5500
Torque (lb.-ft. @ rpm)	310 @ 3000
Compression Ratio	10.0:1
Valvetrain	Ti-VCT DOHC
Valve Operation	Roller-finger follower
Bore & Stroke (in.)	3.45 x 3.7
Main Bearings	6
Induction	Single twin-scroll turbocharger
Fuel System	Direct-injection
Fuel Requirement (octane)	87 (min.)

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Fuel System Data

2019 Ranger

Specs > Powertrain

Sequential Electronic Fuel Injection	Direct-injection
Fuel Pump	Single Electric In-tank High-pressure
	In-tank Electric High-pressure Engine-mounted Booster
Fuel Filter	In-tank Lifetime
Air Cleaner	Dry Element, Replaceable

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Cooling System Specifications

2019 Ranger

Specs > Powertrain

Engine	Radiator Usage	Frontal Area (sq. cm.)	Core Size (mm)			Fins Per dm	Cooling System Cap. (liters)	Fans	
			Height	Width	Core			Diameter (mm)	No. of Blades
2.3L EcoBoost I-4	Standard	39.3	664.6	590	28	75	11.5	500	7
	Trailer Tow	39.3	664.6	590	28	75			

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Transfer Case Specifications

2019 Ranger

Specs > Powertrain

Shift Type	Electric Shift-On-the-Fly (ESOF)
Gear Type	2-speed Planetary Gears
Lubricant Capacity (qt.)	1.3 – 1.5
Gear Ratio — High	1.00:1
Gear Ratio — Low	2.64:1
Case Material	Magnesium

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Trailer Towing/Camper Information

2019 Ranger

Specs > Special Applications

For additional towing information, refer to the 2019 RV & Trailer Towing Guide, available as a printable PDF on **eSourceBook** or the vehicle owner manual for more information.

Alternator Specifications

2019 Ranger

Specs > Electrical

Output (ampere)(1)	150
Output (watts)	2025

(1) Actual output is temperature- and application-dependent.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Battery Applications

2019 Ranger

Specs > Electrical

Ampere-Hour Rating	70	80
Cold-Cranking Amps at 0°F	700	800
2.3L EcoBoost I-4	XL/XLT(1)	Lariat(1)

(1) Absorbent Glass Mat (AGM) battery.

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Cold Weather Recommendations

2019 Ranger

Specs > Electrical

Minimum Temperature	Equipment	
	HD Battery	Engine Block Heater
0°F	Suggested	Not Needed
-10°F	Recommended	Suggested
-20°F	Recommended	Recommended
Below -20°F	Strongly Recommended	Strongly Recommended

DEFINITIONS

Suggested: Helpful, but not needed.

Recommended: Could improve reliability in less-than-ideal conditions.

Strongly Recommended: Will give definite improvement over the standard components.

HD Battery: Higher-capacity battery available. (Usage varies by model.)

Engine Block Heater: Available equipment for all engines. (Usage and heater capacity vary with engine requirements.)

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Standard Lighting/Reflector Equipment

2019 Ranger

Specs > Electrical

Light Reflector	Application
Headlamps (Halogen)	XL, XLT
Headlamps LED	Lariat
Parking Lamps	All Series — Integral with turn signals
Front/Rear Turn Signals	All Series
Front Side Marker Lamps	All Series
Front Side Reflectors	All Series
Rear Side Reflectors	All Series
Rear Side Marker Lamps	All Series — integral with taillamps
License Plate Lamps	All Series
Two Combination Taillamps with Integral Stop, Turn Signal and Backup Lamps and Reflective Surface	All Series
Rear Reflectors	All Series
Front Daytime Running Lamps	All Vehicles Registered in Canada

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

Light Specifications and Usage

2019 Ranger

Specs > Electrical

Light	Code	Description	Usage
Daytime Running Lamps	STD	(2) Replaceable bulbs, Halogen	All Vehicles Registered in Canada
Headlamps	STD	(2) Replaceable bulbs, Halogen	All Vehicles Registered in U.S. and Canada

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

4-/7-pin Trailer Towing Wiring Harness

2019 Ranger

Specs > Electrical

Circuit Number	Circuit Description	Color Code
RAT08	Ground	White
CAT17	Parking Lamps	Brown
CAT14	Trailer Battery Feed	Orange
CAT19	To Electric Brakes	Dark Blue
CAT09	RH Turn Signal and Stop Lamps	Dark Green
CAT06	LH Turn Signal and Stop Lamps	Yellow
CAT03/CAT16	Trailer Backup Lamps	Gray with Brown Stripe
CBP30	Front Brake Controller Running Lamp Feed/Park Lamp Feed	Yellow with Blue Stripe
CBP40	Rear Brake Controller Running Lamp Feed/Park Lamp Feed	Yellow with Green Stripe
CLS30	Brake Controller Running Lamp Feed/Park Lamp Feed	Violet with White Stripe
CCB08	Vehicle Stop Lamps	Violet with White Stripe
SBB18/SBB17	B+ to Electric Brake Controller	Yellow with Red Stripe

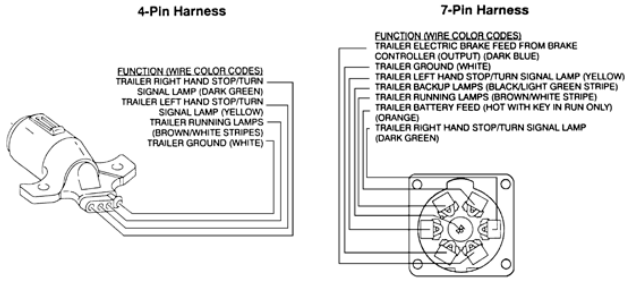
4-Pin Harness
FUNCTION (WIRE COLOR CODES)
TRAILER RIGHT HAND STOP/TURN SIGNAL LAMP (DARK GREEN)
TRAILER LEFT HAND STOP/TURN SIGNAL LAMP (YELLOW)
TRAILER RUNNING LAMPS (BROWN/WHITE STRIPES)
TRAILER GROUND (WHITE)
7-Pin Harness
FUNCTION (WIRE COLOR CODES)
TRAILER ELECTRIC BRAKE FEED FROM BRAKE CONTROLLER (OUTPUT) (DARK BLUE)
TRAILER GROUND (WHITE)
TRAILER LEFT HAND STOP/TURN SIGNAL LAMP (YELLOW)
TRAILER BACKUP LAMPS (BLACK/LIGHT GREEN STRIPE)
TRAILER RUNNING LAMPS (BROWN/WHITE STRIPE)
TRAILER BATTERY FEED (HOT WITH KEY IN RUN ONLY) (ORANGE)
TRAILER RIGHT HAND STOP/TURN SIGNAL LAMP (DARK GREEN)

NOTE: Specifications and descriptions contained within are based upon the most current information available at the time of release. Content subject to change.

® Copyright 2018, Ford Motor Company | Rights are granted to dealership personnel to download the contents of this web page in electronic or paper form. All other rights are reserved, including the rights to create derivative works and/or other web pages. Printed copies are not controlled.